

High-Speed Horizontal Machining Centers

MB-Hseries

***MB-4000H / MB-8000H
MB-10000H***



MB-Hseries

MB-4000H / MB-8000H / MB-10000H



High accuracy / High productivity

The best series for all types of machining—from mass produced parts to large, high value-added parts—based on a concept of smooth, stress-free operation.

- High productivity Reduced non-cutting time
- High accuracy Outstanding accuracy stability with use of Thermo-Friendly Concept
- Easy to operate User friendly
- Expandable Easy to add more specs



MB-4000H



MB-8000H

Higher productivity achieved with higher machining capacity and reduced non-cutting time

High machining capacities achieved with fast, powerful spindles

■ **Machining capacity** **1,081 cm³/min** (MB-8000H actual data)
 ø200 face mill, material: S45C
 high power spindle: 6,000 min⁻¹ (45/37 kW [20 min/cont]) (Optional)

Tool	Spindle speed min ⁻¹	Cutting m/min	Feed rate mm/min	Cut width mm	Cut depth mm	Chips cm ³ /min
MB-4000H Standard spindle: 15,000 min ⁻¹ Material: S45C ø80 face mill 8 blades (carbide)	895	225	2,650	56	2.7	400
ø20 roughing end mill 7 flutes (carbide)	4,000	251	5,320	6	20	638
ø35 insert drill (carbide)	880	97	132	-	-	-
Tap M30P3.5	320	30	1,120	-	-	-
MB-8000H Standard spindle: 6,000 min ⁻¹ Material: S45C ø100 face mill 10 blades (carbide)	955	300	3,220	70	4	901
ø50 porcupine cutter (carbide)	955	150	504	25	50	630
ø63 insert drill (carbide)	950	188	180	-	-	-
Tap M42P4.5	90	12	405	-	-	81% (Spindle load)
MB-8000H High power spindle: 6,000 min ⁻¹ Material: S45C ø200 face mill 10 blades (carbide)	398	250	1,404	140	5.5	1,081

Note: The data shown here represent "actual data," which may not be obtained under different specifications, tooling, cutting, and other conditions.

■ Optimal performance with a wide range of spindle variations

The types available include: standard, for various applications; optimal high-speed / wide-range, for highly efficient aluminum and die/mold machining; optimal high-power, for difficult-to-cut and high stock removals — just pick the right spindle for the job.


MB-4000H Standard spindle	7/24 taper No. 40, HSK-A63* ● Spindle speed: 15,000 min ⁻¹ ● Output: 26/18.5 kW (10 min/cont) ● Torque: 163/120 N-m (5 min/cont)
High-speed spindle*	HSK-A63 ● Spindle speed: 20,000 min ⁻¹ ● Output: 30/22 kW (10 min/cont) ● Torque: 57/42 N-m (10 min/cont)

* Optional


MB-8000H/MB-10000H Standard spindle	7/24 taper No. 50, HSK-A100* ● Spindle speed: 6,000 min ⁻¹ ● Output: 30/22 kW (10 min/cont) ● Torque: 606/349 N-m (10 min/cont)
Wide-range spindle*	7/24 taper No. 50, HSK-A100 ● Spindle speed: 12,000 min ⁻¹ ● Output: 37/26 kW (10 min/cont) ● Torque: 419/284/194 N-m (2 min/10 min/cont)
High power spindle* (MB-8000H)	7/24 taper No. 50, HSK-A100 ● Spindle speed: 6,000 min ⁻¹ ● Output: 45/37 kW (20 min/cont) ● Torque: 1,071/637 N-m (3 min/cont)

* Optional

■ Standard specifications MB-4000H 15,000 min⁻¹

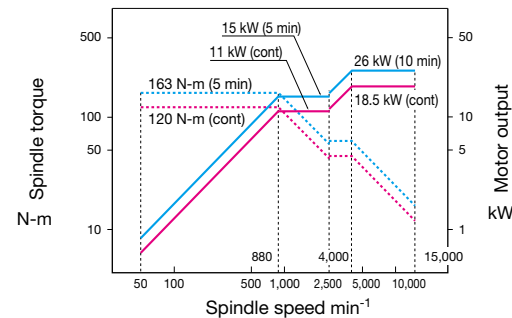

■ Standard specifications MB-8000H 6,000 min⁻¹

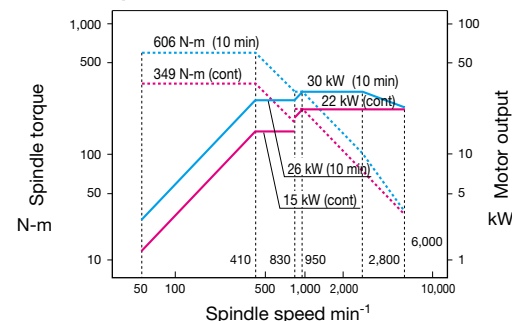

Shorter lead times with reduced non-cutting time

■ Machine performance

Quicker movements reduce non-cutting time—ideal for high-mix production applications.

MB-4000H	MB-8000H
Rapid traverse X-Y-Z: 60 m/min	Rapid traverse X-Y-Z: 50 m/min
Acceleration Max. 1 G	Tool change T-T/C-C: 2.0/5.2 sec
Tool change T-T/C-C: 1.0/2.6 sec (tool weight less than 4 kg) 1.3/2.9 sec (tool weight more than 4 kg)	Pallet change 14.5 sec
Pallet change 7.0 sec	MB-10000H
	Rapid traverse X-Y-Z: 50 m/min
	Tool change T-T/C-C: 2.0/5.5 sec
	Pallet change 15.0 sec


■ Machining Time Shortening Function

MTSF shortens machining time in operations with repeated rapid traverse (G00) and cutting feed (G01) movements, such as for parts with many drilled holes.

(The amount by which machining time is reduced will differ depending on machine setup, machined part shape, and part program.)


■ Turn-Cut (Optional)

Lead times are reduced with this process-intensive turning application done on a machining center.

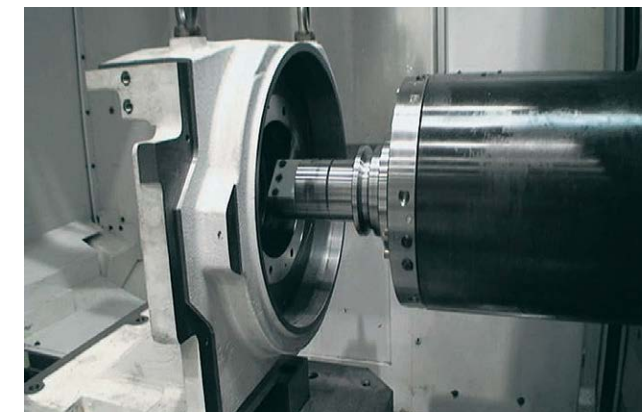

Turning is done with synchronized control with X-Y coordinate arc and tool edge position of rotating spindle tool.


- Machining of tapered holes
- Various diameters can be handled with a single tool
- Machining of ID/OD greater than largest tool diameter

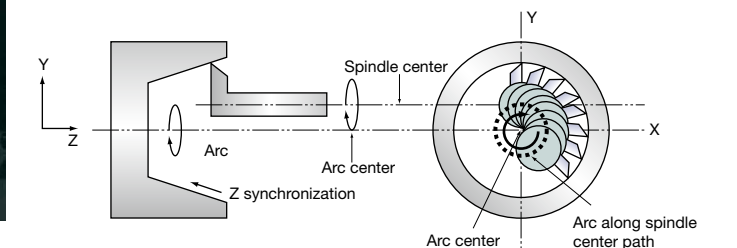

Advanced machine structural design and Okuma Intelligent Technologies achieve highly accurate machining

Machine structure

- Integrated ball screw bracket (except on MB-10000H)
- Y-axis motor base cooling
- Ball screw cooling
MB-4000H (Optional)
- High accuracy double ball screw employed in all axes.
(MB-10000H)
- Bed supports rapid travel of large masses
- High accuracy indexing table
 - Pallet seating surface uses a taper cone system for high accuracy.
 - NC 0.001 degree:
 - MB-4000H (Standard)
 - MB-8000H, 10000H (Optional)
- Highly rigid column strongly withstands bending and torsion

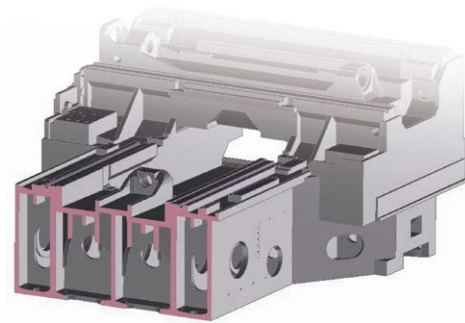

Ribs placed directly under guideways



Diagonal rib configuration of columns



Manageable Deformation—Accurately controlled Thermo-Friendly Concept


High accuracy is enabled in normal factory environments.
The unique approach of “accepting temperature changes.”

The machining accuracy of the workpiece changes significantly due to temperature change in the machine's periphery, heat generated from the machine itself, and heat generated from machining.

This unique Thermo-Friendly Concept, which accommodates such temperature changes, achieves high accuracy in normal factory environments.

Eliminate waste with the Thermo-Friendly Concept

In addition to maintaining high dimensional accuracy when room temperature changes, Okuma's Thermo-Friendly Concept provides high dimensional accuracy during machine startup and machining restart. To stabilize thermal deformation, warming-up time is shortened and the burden of dimensional correction during machining restart is reduced.

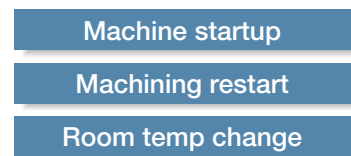

High dimensional stability

● TAS-C (Thermo Active Stabilizer—Construction)

The TAS-C environmental thermal deformation control accurately controls the machine's structural thermal deformation; by taking into consideration the machine's thermal deformation characteristics, temperature data from properly placed sensors, and the location information of the feed axis.

● TAS-S (Thermo Active Stabilizer—Spindle)

The TAS-S spindle thermal deformation control takes into account various conditional changes such as the spindle's temperature data, modification of the spindle rotation and speed, as well as spindle stoppage. The spindle's thermal deformation will be accurately controlled, even when the rotating speed changes frequently.



Optimized Servo Control SERVO NAVI


Achieves long term accuracy and surface quality

■ SERVO NAVI AI (Automatic Identification)

- Cycle time shortened with faster acceleration
Work Weight Auto Setting

On table travel type machining centers, the table feed acceleration with the previous system was the same regardless of weight, such as workpieces and fixtures loaded on the table.

Work Weight Auto Setting estimates the weight of the workpiece and fixture on the table and automatically sets servo parameters, including acceleration, to the optimum values. Cycle times are shortened with no changes to machining accuracy.

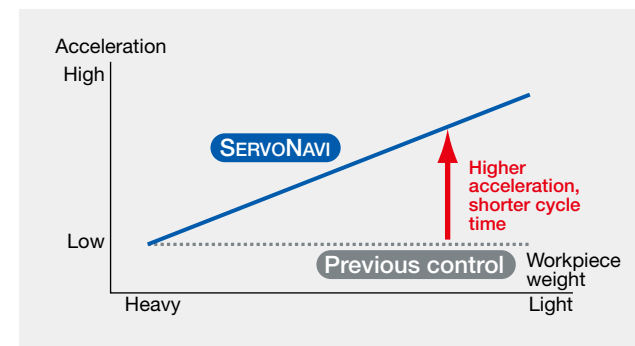

- Maintaining high accuracy and stable operations

Inertia Auto Setting

When workpieces or fixtures are changed, inertia (inertial mass) also changes, sometimes resulting in greater positioning error of the rotary axis.


Inertia Auto Setting estimates workpiece/fixture inertia from acceleration torque and automatically changes servo parameter settings to the optimum values so that high accuracy and stable movement can be maintained.

■ SERVO NAVI SF (Surface Fine-tuning)

- Maintains machining accuracy and surface quality
Reversal Spike Auto Adjustment

Slide resistance changes with length of time machine tools are utilized, and discrepancies occur with the servo parameters that were the best when the machine was first installed. This may produce crease marks at motion reversals and affect machining accuracy (part surface quality).

SERVO NAVI's Reversal Spike Auto Adjustment maintains machining accuracy by switching servo parameters to the optimum values matched to changes in slide resistance.

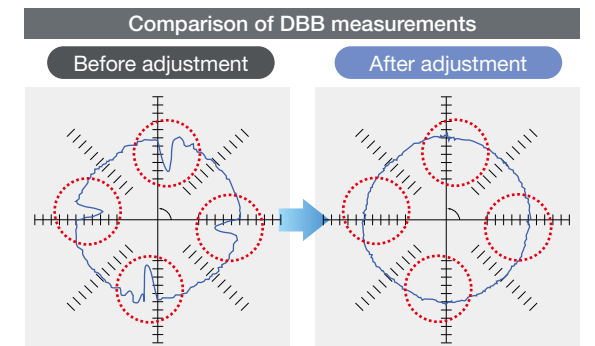


- Contributes to longer machine life

Vibration Auto Adjustment

When aging changes machine performance, noise, vibration, crease marks, or fish scales may appear.

Vibration Auto Adjustment can quickly eliminate noise and vibration even from machines with years of operation.

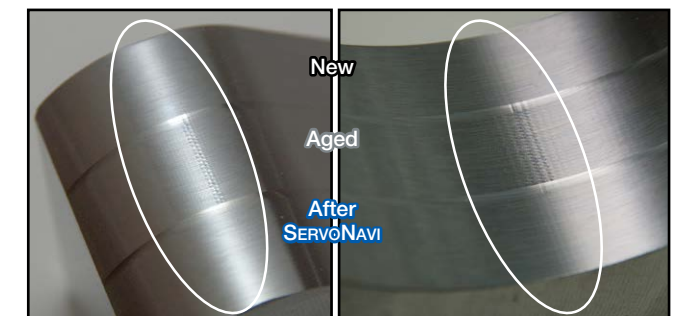

Excellent operability for improved production efficiency

Easy to operate (making life easier for the operator)


Ceiling door

- Good lighting and no coolant dripping
- Easy workpiece mounting/dismounting with a crane



Front-facing ATC magazine (MB-4000H only)

- Easy tool exchange: 48-tool, 64-tool tool magazines
- Magazine door opens to the floor



Column traverse system

(MB-10000H uses a traverse carrier system)

- Outstanding accessibility to pallet (workpiece), spindle


Chip discharge

- Chips discharged directly with center trough just under spindle
- No accumulation of chips in the machining chamber, neat and simple covering
- Washing in-machine and under pallet



In-machine chip conveyor


Chips discharged by conveyor

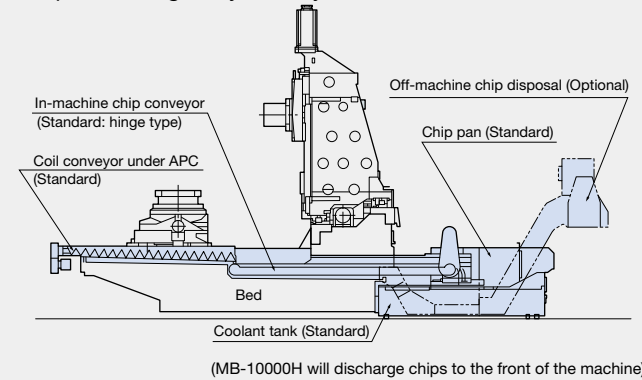

Independent left-side operation panel

(except on MB-10000H)

- Easier to operate the switches and watch machining chamber movements at the same time. (Can swivel)

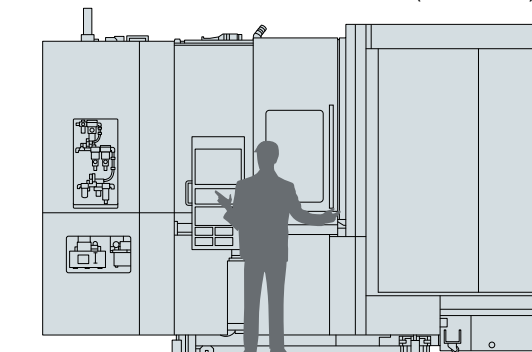

Flexible production of large-variety workpiece applications


An impressive lineup of automation systems

Compatible with production plans matched to high-mix workpiece demand. The best system for the type of production can be selected.


Flexible APC systems

- Multi-pallet APC connects to standard 2-pallet rotary-shuttle APC
- APC change time is the same as in the standard APC
- Can be adapted to match plant layout and type of production


6-pallet APC

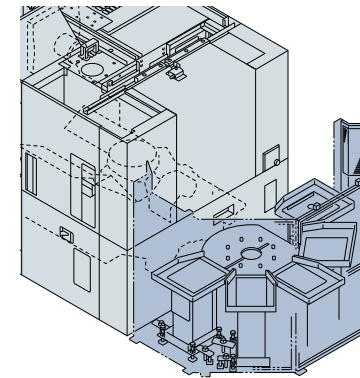

10-pallet APC

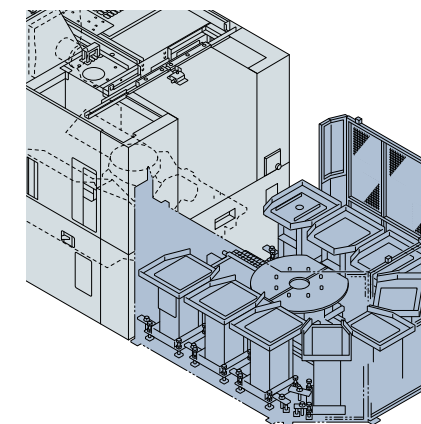


12-pallet APC

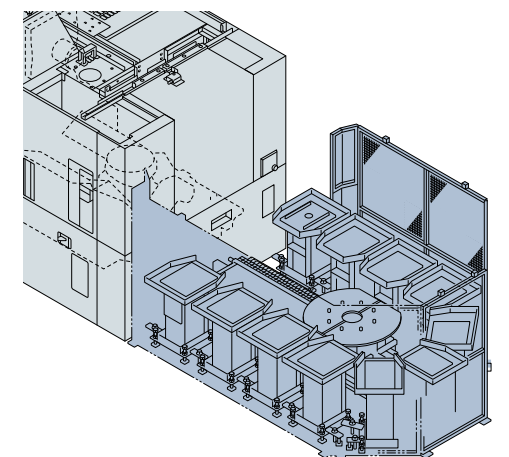

Ready for FMS applications

- An FMS with a smart, expandable stacker crane system

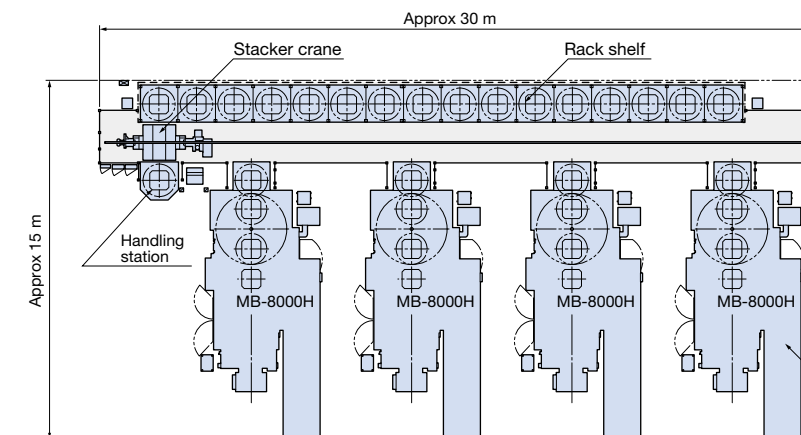

[System layout example]

- MB-8000H 4
- Pallets 32
- Rack levels 2 (system height approximately 5.5 m)
- Handling station 1

285 tool matrix magazine

Efficient high-mix production of diverse parts


Expandable

Respond flexibly with magazine matched to needed tool storage capacity.

Space-saving with large tool capacity




Chain system ATC magazine (64 tool: Optional)

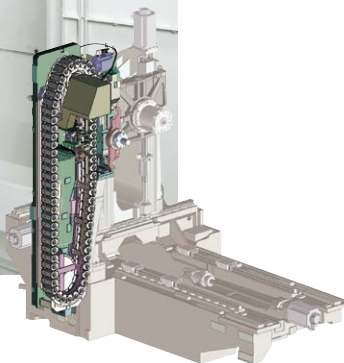

Chain system ATC magazine (front-facing) (MB-4000H only)



Matrix system ATC magazine (Optional)

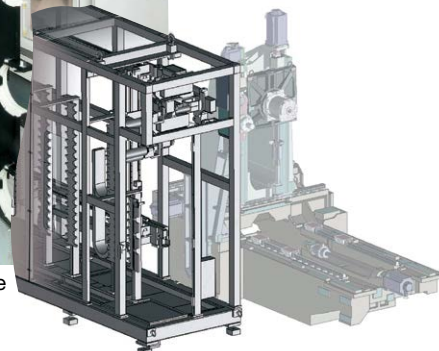

Matrix system ATC magazine

MB-4000H		
Standard	Chain system	48 tools
Optional Specifications	Chain system	64 tools
	Matrix system	110 tools, 146 tools, 182 tools, 218 tools, 326 tools

MB-8000H		
Standard	Chain system	40 tools
Optional Specifications	Chain system	60 tools
	Matrix system	81 tools, 111 tools, 141 tools, 171 tools, 195 tools, 225 tools, 255 tools, 285 tools
	Multiple magazine system	320 tools, 400 tools

MB-10000H		
Standard	Chain system	40 tools
Optional Specifications	Chain system	60 tools
	Multiple magazine system	100 tools, 150 tools, 200 tools, 240 tools, 320 tools, 400 tools


OSP advanced technology



Cutting condition search for milling
Machining Navi M-i, M-g II+ (Optional)

Automatically changes to optimum spindle speed (M-i)


Built-in sensors measure chatter vibration and the machine automatically changes to the best spindle speed.

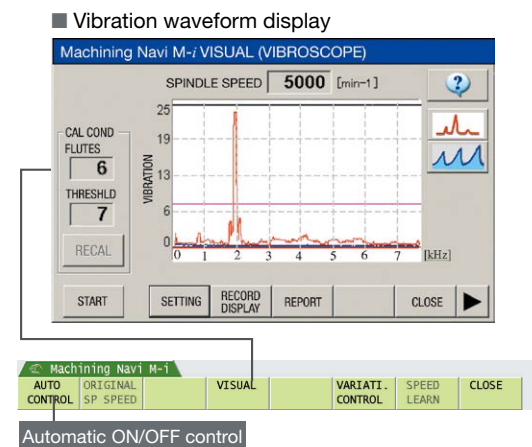

Adjust cutting conditions while monitoring the data (M-g II+)

Navigates effective measures by detecting and analyzing machining chatter with a microphone attached to the machine.


- Changing to optimum spindle speed
- Changing spindle speed
- Lower cutting load required

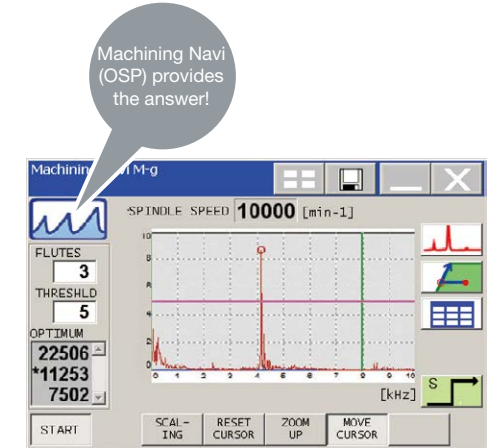

Collision prevention
Collision Avoidance System (Optional)

World's first "Collision-Free Machine"

CAS prevents collisions in automatic or manual mode, providing risk-free protection for the machine and great confidence for the operator.

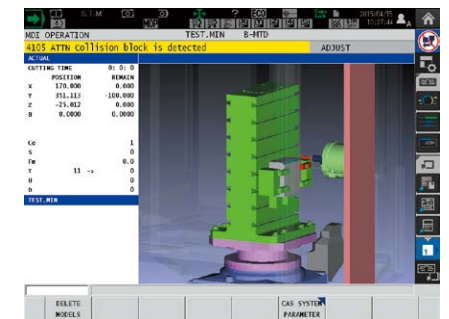

Next-Generation Energy-Saving System

ECO suite

A suite of energy saving applications for machine tools

Accuracy ensured, cooler off ECO Idling Stop

Intelligent energy-saving function with the Thermo-Friendly Concept.

The machine itself determines whether or not cooling is needed and cooler idling is stopped with no loss to accuracy. Electricity consumption during non-machining time greatly reduced with "ECO Idling Stop", which shuts down each piece of auxiliary equipment not in use. (Standard application on machines with Thermo-Active Stabilizer—Spindle)

On-the-spot check of energy savings ECO Power Monitor

Power is shown individually for spindle, feed axes, and auxiliaries on the OSP operation screen. The energy-saving benefits from auxiliary equipment stopped with ECO Idling Stop can be confirmed on the spot.

Intermittent/continuous operation of chip conveyor and mist collector during operation

ECO Operation (Optional)

Energy-saving hydraulic unit using servo control technology

ECO Hydraulics (Optional)

Machine Specifications

	Item	Unit	MB-4000H	MB-8000H	MB-10000H	
Travels	X axis (Left/right column/ MB-10000H uses left/right carrier)	mm (in)	560 (22.05)	1,300 (51.18)	1,400 (55.12)	
	Y axis (spindle up/down)	mm (in)	560 (22.05)	1,100 (43.31)	1,250 (49.21)	
	Z axis (table front/back)	mm (in)	625 (24.61)	1,250 (49.21)		
	Spindle center to pallet top	mm (in)	50 to 610 (1.97 to 24.02)	50 to 1,150 (1.97 to 45.28)	-20 to 1,230 (-0.79 to 48.43)	
	Spindle nose to pallet center	mm (in)	85 to 710 (3.35 to 27.95)	100 to 1,350 (3.94 to 53.15)		
Pallet	Pallet size	mm (in)	400 × 400 (15.75 × 15.75)	800 × 800 (31.50 × 31.50)	1,000 × 1,000 (39.37 × 39.37)	
	Max load	kg (lb)	400 (880)	2,000 (4,400) [2,500 (5,500)]*1	2,000 (4,400)	
	Indexing angle	deg	0.001	1 [0.001]		
	Max workpiece dimensions	mm (in)	ø600 × 900 (ø23.62 × 35.43)	ø1,450 × 1,450 (ø57.09 × 57.09)	ø1,400 × 1,450 (ø55.12 × 57.09)	
Spindle	Spindle speed	min ⁻¹ (rpm)	50 to 15,000 [50 to 20,000]	50 to 6,000 [12,000, 6,000 high power]	50 to 6,000 [50 to 12,000]	
	Tapered bore		7/24 taper No. 40 [HSK-A63]	7/24 taper No. 50 [HSK-A100]		
	Bearing dia	mm (in)	ø70 (ø2.76)	ø100 (ø3.94)		
Feed rate	Rapid traverse	m/min (ipm)	X-Y-Z: 60 (2,362)	X-Y-Z: 50 (1,969)		
	Cutting feed rate	mm/min (ipm)	1 to 60,000 (0.04 to 2,362)	1 to 50,000 (0.04 to 1,969)		
Motors	Spindle (10 min/cont)	kW (hp)	26/18.5 (35/25) [30/22 (47/33)]	30/22 (40/30) [37/26 (50/35), 45/37 (60/50) (20 min/cont)]	30/22 (40/30) [37/26 (50/35)]	
	Feed axes	kW (hp)	X: 4.6 (6.13), Y-Z: 3.5 (4.67)	X: 5.1 (6.8), Y: 3.5 (4.7) × 2, Z: 5.1 (6.8)	X-Y-Z: 4.6 (6.1) × 2	
	Table indexing	kW (hp)	3.0 (4.0)	4.6 (6.1)		
ATC	Tool shank		MAS403 BT40 [HSK-A63]	MAS403 BT50 [HSK-A100]		
	Pull stud		MAS 2 [-]			
	Magazine capacity	tools	48 [64, 110 to 326]	40 [60, 81 to 285, 320, 400]	40 [60, 100 to 400]	
	Max tool dia (w/ adjacent)	mm (in)	ø70 (ø2.76)	ø140 (ø5.51)		
	Max tool dia (w/o adjacent)	mm (in)	ø150*2 (ø5.91)	ø240 (ø9.45) [ø315 (ø12.40)]*3	ø240 (ø9.45)	
	Max tool length	mm (in)	300 (11.81) [400 (15.75)]*3	600 (23.62) [800 (31.50)]*3*5	600 (23.62)	
	Max tool weight	kg (lb)	10 (22)	25 (55) [30 (66)]*3	25 (55)	
	Tool selection		Memory random*4	Memory random*6	Memory random*7	
	Machine Size	Height	mm (in)	2,647 (104.21)	3,449 (135.79)	3,410 (134.25)
		Floor space; width × depth	mm (in)	2,420 × 4,700 (95.28 × 185.04)	3,960 × 7,505 (155.91 × 295.47)	4,545 × 6,465 (178.94 × 254.53)
Weight		kg (lb)	9,500 (20,900)	27,000 (59,400)	33,600 (73,920)	
Controller			OSP-P300MA			

- *1. Machine component movements become slower with this optional specification. *2. Max tool size 2 pots away can not exceed ø110 mm (ø4.33 in)
 *3. Shutter open/close times become longer with the optional specification. *4. Fixed address for 110 or more tools
 *5. Max workpiece diameters may be limited by required tool lengths. *6. Fixed address for 81 or more tools *7. Fixed address for 100 or more tools [] : Optional

Standard Specifications

Spindlehead cooling system	Oil controller	Work lamp	LED, 1 location*3
Hydraulic unit		Status indicator	3-lamp signal tower
Centralized lubrication automatic oil supplier	MB-4000H	Tank 6 L	Foundation blocks
	MB-8000H	Tank 20 L	Side-slip prevention tool
	MB-10000H	Oil level alarm and pressure alarm equipped	Chemical anchors included
Coolant supply system	MB-4000H	Tank 750 L (510 L*), Pump motor 1,500 W (double use for nozzle and in-machine)	Automatic tool changer
	MB-8000H	Tank 1,100 L (690 L*), Pump motor 390 W*2 (for nozzle), 550 W (for in-machine wash)	MB-4000H
	MB-10000H	Tank 840 L (530 L*), Pump motor 390 W*2 (for nozzle), 1,500 W (for in-machine wash)	MB-8000H
		MB-10000H	Tool capacity: 48
		1-degree indexing table	Tool capacity: 40
		APC	MB-4000H indexing: 0.001 degree (MB-4000H only)
		In-machine chip discharge*5	2-pallet rotary-shuttle*4
		Chip pan for above	Hinge type chip conveyor
		In-machine chip discharge (below APC)	MB-10000H uses a lift-up conveyor; chip pan not required.
		Ball screw cooling	Coil type chip conveyor
		TAS-S	N/A for MB-10000H which discharges to front
		TAS-C	Optional on MB-8000H, MB-10000H
		Door interlock	Optional on MB-8000H, MB-10000H
		B-axis rotation interlock	Optional on MB-4000H, MB-8000H


- *1. Effective *2. At 50 Hz *3. 2 locations on MB-8000H and MB-10000H
 *4. Pallets with MAS tapped holes *5. Directly below the spindle

Optional Specifications

Spindle speeds	MB-4000H	50 to 20,000 min ⁻¹ , HSK-A63, 30/22 kW	Mist collector	
	MB-8000H MB-10000H	50 to 12,000 min ⁻¹ , No.50, 37/26 kW	Chip air blower	Adapter
Main motor	MB-8000H	50 to 6,000min ⁻¹ , No.50, 45/37 kW, 1,071 N-m	In-machine discharge	Scraper type chip conveyor
Dual contact spindle	MB-4000H	HSK-A63, BIG-PLUS®	Off-machine chip discharge (lift-up chip conveyor)	Please see the recommended chip conveyors below
	MB-8000H MB-10000H	HSK-A100, BIG-PLUS®	Chip buckets (heights)	L type: 700 mm, H type: 1,000 mm
ATC magazine capacity (tools)	MB-4000H	64 (chain)	Hydraulic oil cooler	
		110, 146, 182, 218, 326 (matrix)	Coolant heater/cooler	
	MB-8000H	60 (chain)	Auto tool length compensation	Touch sensor (w/tool breakage detection)
		81, 111, 141, 171, 195, 225, 255, 285 (matrix)	Auto gauging (w/zero offset)	Touch probe
MB-10000H	320, 400 (multiple magazine)	Pull stud shape	MAS-1, JIS, CAT, DIN	
	60 (chain)	Standard T-column fixture		
AbsoScale detection	X-Y-Z axis	100, 150, 200, 240, 320, 400 (multiple magazine)	Standard square-column fixture	
		Built-in NC table (standard specification on MB-4000H)	Angle plate	
Auto 0.001 indexing table		6, 10, 12*1, FMS	Ball-screw cooler	Std: MB-8000/10000H [Opt: -4000H]
APC pallets		T-slot	Additional work lamp	
Pallet surfaces			Machining Navi	M-i, M-gII+
Spare pallets			Turning cut	
Edge locator			Hydraulic fixture systems	Linked, pallet-thru types
Coolant pump			TAS-S	Std: MB-4000H [Opt: -8000/10000H]
Thru-tool coolant	1.5 MPa		TAS-C	Optional for all 3 models
Thru-spindle coolant*2	MPa: 1.5, 7.0, large flow 1.5, large flow 7.0		Recommended for die machining	AbsoScale detection (X-Y-Z axes)
Semi-dry machining	Thru-spindle, thru nozzle, thru/nozzle switch		Work wash gun	Hyper-Surface
Shower coolant	10 nozzles, 550-W pump		Oil mist lubricator	DNC-DT, 0.1 µm control
Table area wash discharge				
Work wash gun	250 W pump			

- *1. 12 pallets for MB-4000H only. *2. Okuma pull studs required.

Optional Spindles (Optional)

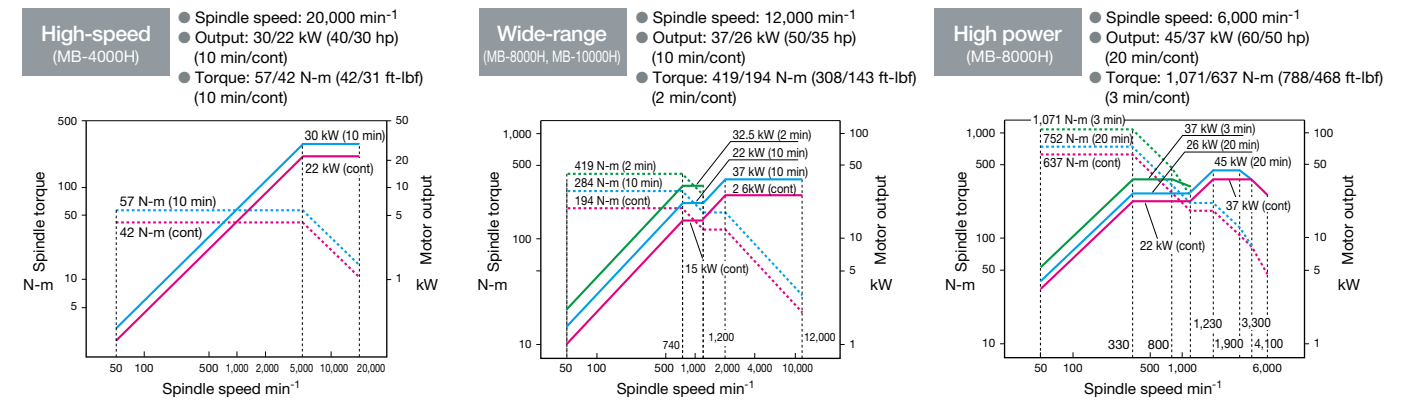

Recommended chip conveyors (Please contact an Okuma sales representative for MB-10000H recommendations.)

Workpiece material	Steel	FC	Aluminum / Non-ferrous metal	Mixed (general use)
Chip shape				
In-machine	Hinge type (Standard) *			
Off-machine chip discharge (Optional)	Hinge type			
	Scraper type			
	Scraper type (with drum filter)			
	Hinge + scraper (with drum filter)			

○ : Recommended
 △ : Conditionally recommended

* Scraper type (optional) can be selected.
 *1. When there are many fine chips
 *2. When chips are longer than 100 mm
 *3. When chips are shorter than 100 mm
 *4. When there are few fine chips
 Note: When chips are dry, clean out chips that have accumulated under the pallet or elsewhere in the machine as needed.

Off-machine lift-up chip conveyors


Name	Hinge	Scraper	Scraper (with drum filter)	Hinge + scraper (with drum filter)
Shape				

With revamped operation and responsiveness— ease of use for machine shops first!

Smart factories are using advanced digitization and networking (IIoT) in manufacturing to achieve enhanced productivity and added value. The OSP has evolved tremendously as a CNC suited to advanced intelligent technology. Okuma's new control uses the latest CPUs for a tremendous boost in operability, rendering performance, and processing speed. The OSP suite also features a full range of useful apps that could only come from a machine tool manufacturer, making smart manufacturing a reality.

Smooth, comfortable operation with the feeling of using a smart phone

Improved rendering performance and use of a multi-touch panel achieve intuitive graphical operation. Moving, enlarging, reducing, and rotating 3D models, as well as list views of tool data, programs, and other information can be accomplished through smooth, speedy operations with the same feel as using a smart phone. The screen display layout on the operation screen can also be changed to suit operator preferences and customized for the novice and/or veteran machinists.

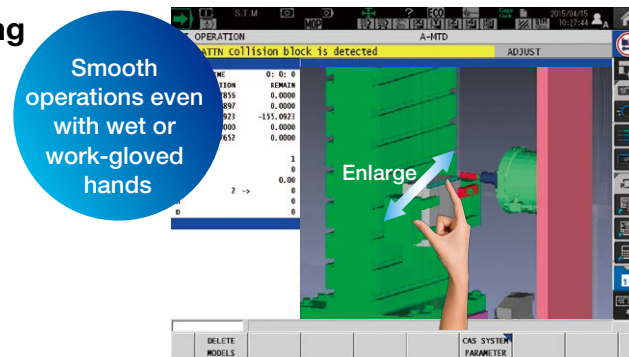


Note: 15-in. operation panel screen shots. Collision Avoidance System (Optional) shown above.

“Just what we wanted.”— Refreshed OSP suite apps

This became possible through the addition of Okuma's machining expertise based on requests we heard from real, machine-shop customers. The brain power packed into the CNC, built by a machine tool manufacturer, will “empower shop floor” management.

Routine inspection support Maintenance Monitor

The Maintenance Monitor displays items for inspections before starting daily operation and regular inspections and the rough estimate of inspection timing. Touching the [INFO] button displays the PDF instruction manual file of relevant maintenance items.

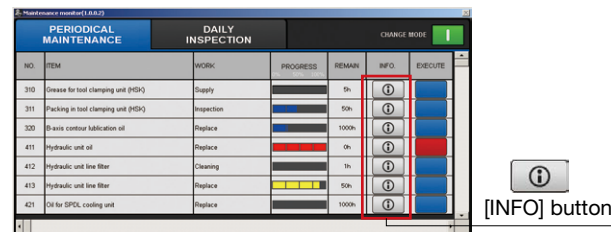


- Spindle Output Monitor**: Increased productivity through visualization of motor power reserve.
- Turn-Cut Guide (Optional)**: Making new machining technology simpler and easier to use.
- E-mail Notification**: Monitoring operating status even when away from the machine.
- Screen Capture**: Automatic saving of recorded alarms.
- Scheduled Program Editor**: Easy programming without keying in code.

Get Connected, Get Started, and Get Innovative with Okuma “Monozukuri” Connect Plan

Connect, Visualize, Improve

Okuma's Connect Plan is a system that provides analytics for improved utilization by connecting machine tools and visual control of factory operation results and machining records. Simply connect the OSP and a PC and install Connect Plan on the PC to see the machine operation status from the shop floor, from an office, from anywhere. The Connect Plan is an ideal solution for customers trying to raise their machine utilization.

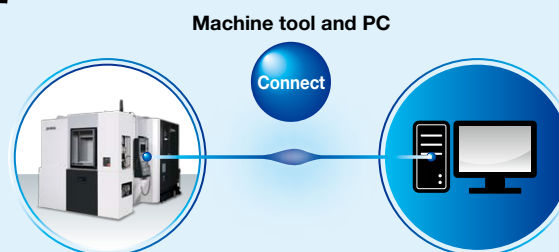

Standard Specifications

Basic Specs	Control	X, Y, Z, simultaneous 3 axis, spindle control (1 axis)
	Position feedback	OSP full range absolute position feedback (zero point return not required)
	Coordinate functions	Machine coordinate system (1 set), work coordinate system (20 sets)
	Min / Max command	±99999.999 mm, ±9999.9999° 8-digit decimal, command units: 0.001 mm, 0.01 mm, 1 mm, 0.0001°, 0.001°, 1°
	Feed	Cutting feed override 0 to 200%, rapid traverse override 0 to 100%
	Spindle control	Direct spindle speed commands, override 30 to 300%, multi-point indexing
	Tool compensation	No. of registered tools: Max 999 sets, tool length/radius compensation: 3 sets per tool
	Display	15-inch color LCD + multi touch panel operations
	Self-diagnostics	Automatic diagnostics and display of program, operation, machine, and NC system faults
Programming	Program capacity	Program storage capacity: 4 GB; operation backup capacity: 2 MB
	Program operations	Program management, editing, multitasking, scheduled program, fixed cycle, G-/M-code macros, arithmetic, logic statements, math functions, variables, branch commands, coordinate calculate, area calculate, coordinate convert, programming help
Operations	“suite apps”	Applications to graphically visualize and digitize information needed on the shop floor
	“suite operation”	Highly reliable touch panel suited to shop floors. One-touch access to suite apps.
	Easy Operation	“Single-mode operation” to complete a series of operations; advanced operation panel/graphics facilitate smooth machine control
	Machine operations	MDI, manual (rapid traverse, manual cutting feed, pulse handle), load meter, operation help, alarm help, sequence return, manual interrupt/auto return, pulse handle overlap, parameter I/O, PLC monitor, Cycle time reduction easy setting
	MacMan	Machining management: machining results, machine utilization, fault data compile & report, external output
Communications / Networking		USB (2 ports), Ethernet
High speed/accuracy specs		Hi-G Control, Hi-Cut Pro, pitch error compensation, SERVO NAVI, Machining Time Shortening Function, TAS-S (Thermo Active Stabilizer—Spindle) : MB-4000H
Energy-saving	ECO suite	ECO Idling Stop ^{*1} , ECO Power Monitor ^{*2}

*1. Spindle cooler Idling Stop is used on TAS-S machines.


*2. The power display shows estimated values. When precise electrical values are needed, select the wattmeter option.

Optional Specifications

Item	Kit Specs	NML		3D		AOT	
		E	D	E	D	E	D
Interactive functions							
Advanced One-Touch IGF-M (Real 3-D simulation included)							
Interactive MAP (I-MAP)							
Programming							
Auto scheduled program update							
Additional G-/M-code macros							
Common variables	1,000 pcs						
(Std: 200 pcs)	2,000 pcs						
Program branch; 2 sets							
Program notes (MSG)							
Coordinate system selection	100 sets						
(Std: 20 sets)	200 sets						
	400 sets						
Helical cutting (within 360°)							
3D circular interpolation							
Synchronized Tapping II							
Arbitrary angle chamfering							
Cylindrical side facing							
Slope machining							
Tool grooving (flat-tool free-shaped grooving)							
Turn-Cut							
Tool max rotational speed setting							
F1-digit feed	4 sets, 8 sets, parameter						
Programmable travel limits (G22, G23)							
Skip (G31)							
Axis naming (G14)							
3-D tool compensation							
Tool wear compensation							
Drawing conversion	Programmable mirror image (G62)						
	Enlarge/reduce (G50, G51)						
User task 2	I/O variables (16 each)						
Tape conversion ^{*1}							
Monitoring							
Real 3D simulation							
Simple load monitor	Spindle overload monitor						
NC operation monitor	Hour meter, work counter						
Hour meters	Power, spindle, NC, cutting						
Operation end buzzer	With M02, M30, and END commands						
Work counter	With M02 and M30 commands						
MOP-TOOL	Adaptive control, overload monitor						
AI machine diagnostics	Feed axes, Spindle						
Machining data logger							
Cutting Status Monitor							
Tool life management	Hour meter, No. of workpieces						
Gauging							
Auto gauging	Touch probe (G31)						
Auto zero offset	Includes auto gauging						
Tool breakage detection	(touch sensor) (G31)						
	Includes auto tool offset						
Gauging data printout	File output						
Manual gauging (w/o sensor)							
Interactive gauging (touch sensor, touch probe required)							
External I/O communication							
RS-232C connector							
DNC-T3							
DNC-B (RS-232C-Ethernet transducer used on OSP side)							
DNC-DT							
DNC-C/Ethernet							
Additional USB (Additional 2 ports, Std: 2 ports)							
Automation / untended operation							
Auto power shut-off	M02 and END alarms, work preps done						
Warm-up (calendar timer)							
External program selection	Button, rotary switch, digital switch BCD (2-digit, 4-digit)						
Cycle time reduction (Ignores certain commands)							
Pallet pool control (PPC) (Required for multi-pallet APC)							
Robot, loader I/F							
High-speed, high-precision							
AbsoScale detection	X-, Y-, Z-axis						
Inductosyn detection	Additional axes						
Hyper-Surface ^{*4}							
0.1 μm control (linear axis commands)							
TAS-S (Thermo Active Stabilizer—Spindle) ^{*2}							
TAS-C (Thermo Active Stabilizer—Construction)							
ECO suite (energy saving functions)							
ECO Operation							
ECO Power Monitor	Wattmeter						
Energy-saving hydraulic unit	Inverter						
	ECO Hydraulics						
Other							
Control cabinet lamp (inside)							
Circuit breaker							
Sequence operation	Sequence stop						
Upgraded sequence restart	Mid-block return						
Pulse handles	2 pcs, 3 pcs (Std: 1 pc)						
External M signals	4, 8 signals						
Collision Avoidance System (CAS) ^{*3}							
Machining Navi M-I, M-gII+ (cutting condition search)							
One-Touch Spreadsheet							
Block skip; 3 sets							
Additional axes	A, B, C axes [preps, specs]						
Fixture offset							
OSP-VPS (Virus Protection System)							
19-inch display operation panel w/adjustable-tilt keyboard							


■ Pallet dimensions

Unit: mm

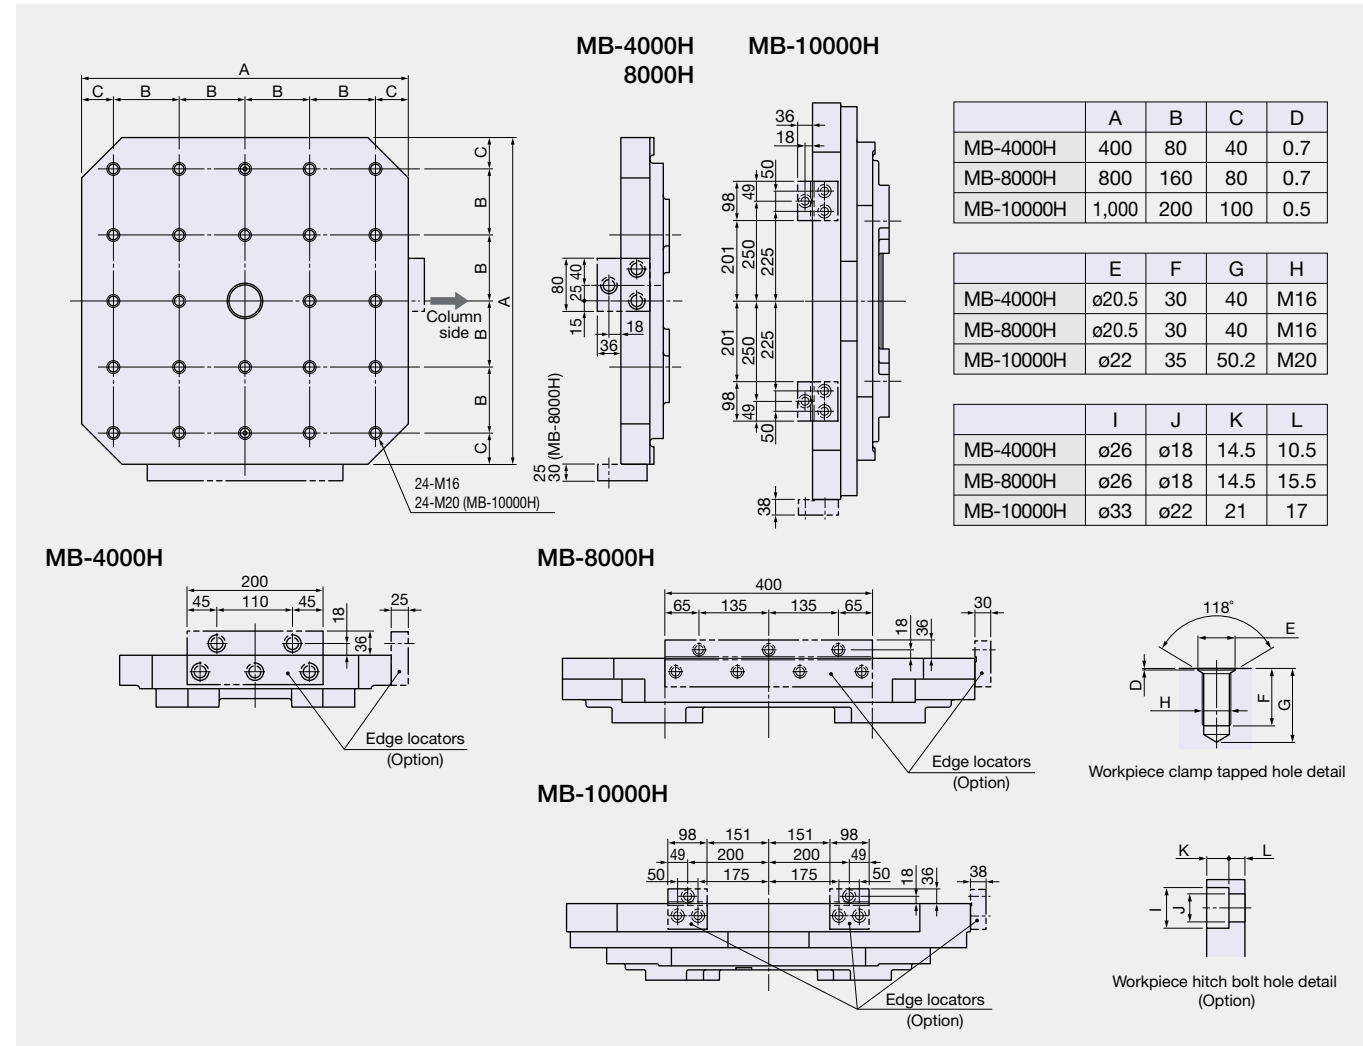


■ MB-4000H Dimensional and Installation Drawings

Unit: mm (in)

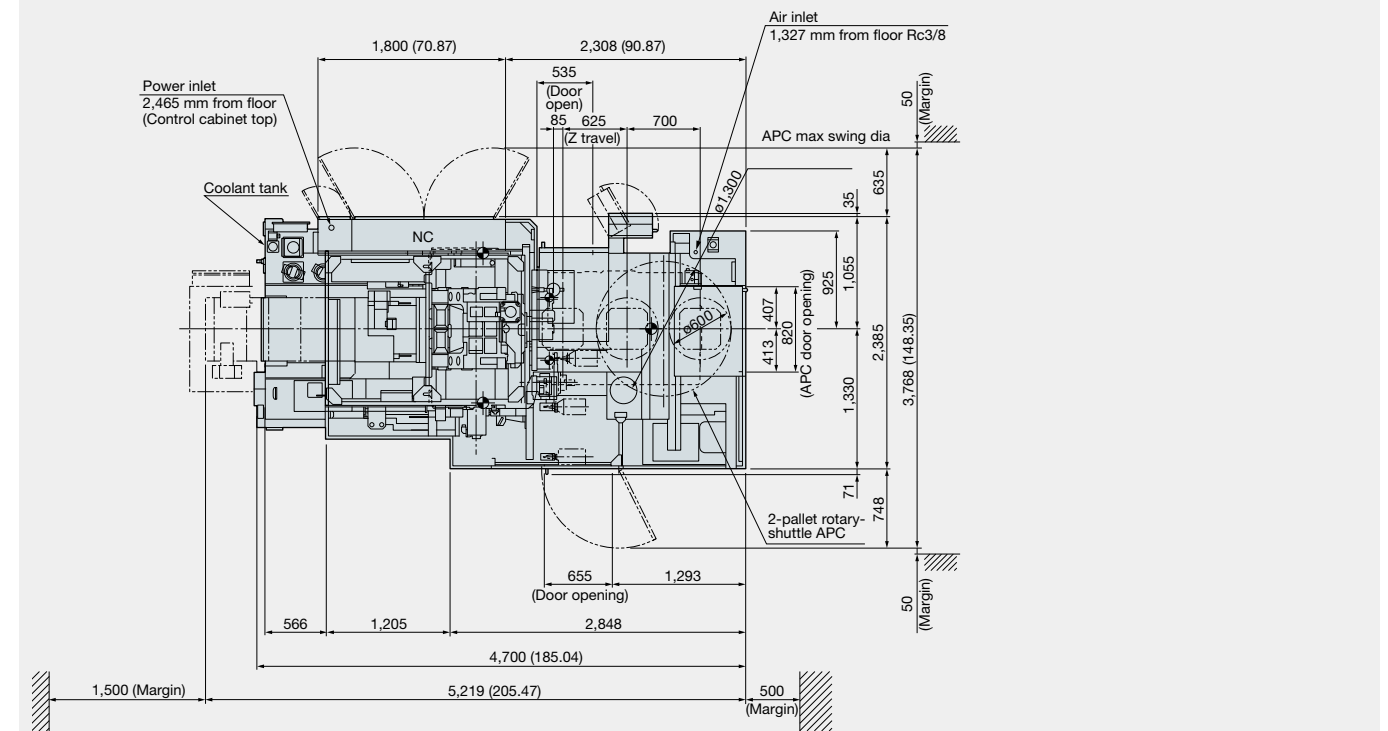


■ Working range

Unit: mm

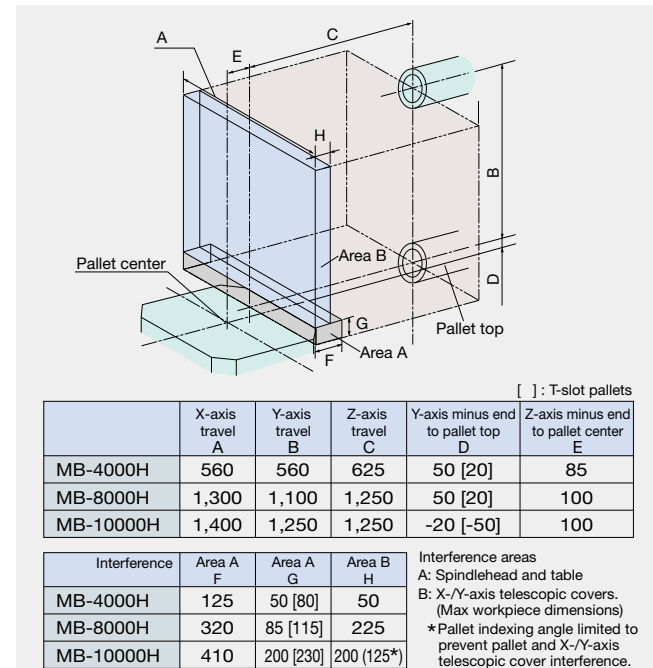



■ Maximum workpiece dimensions

Unit: mm

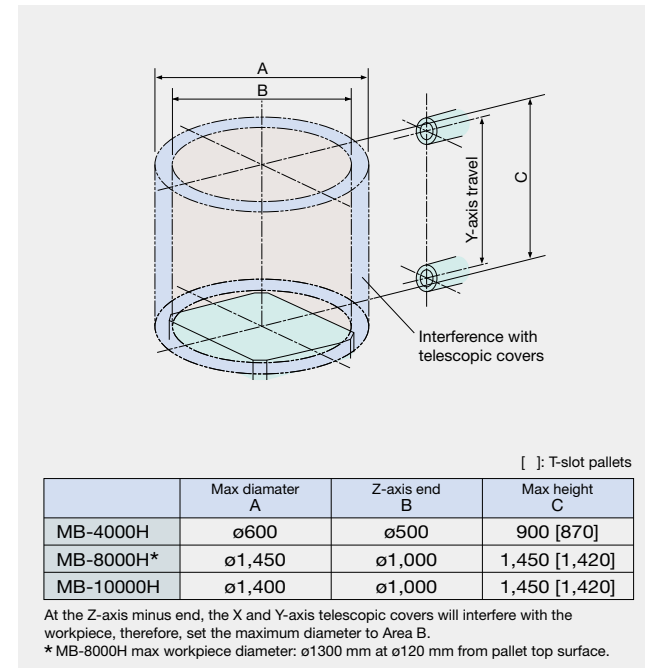



MB-8000H
Dimensional and Installation Drawings

Unit: mm (in)

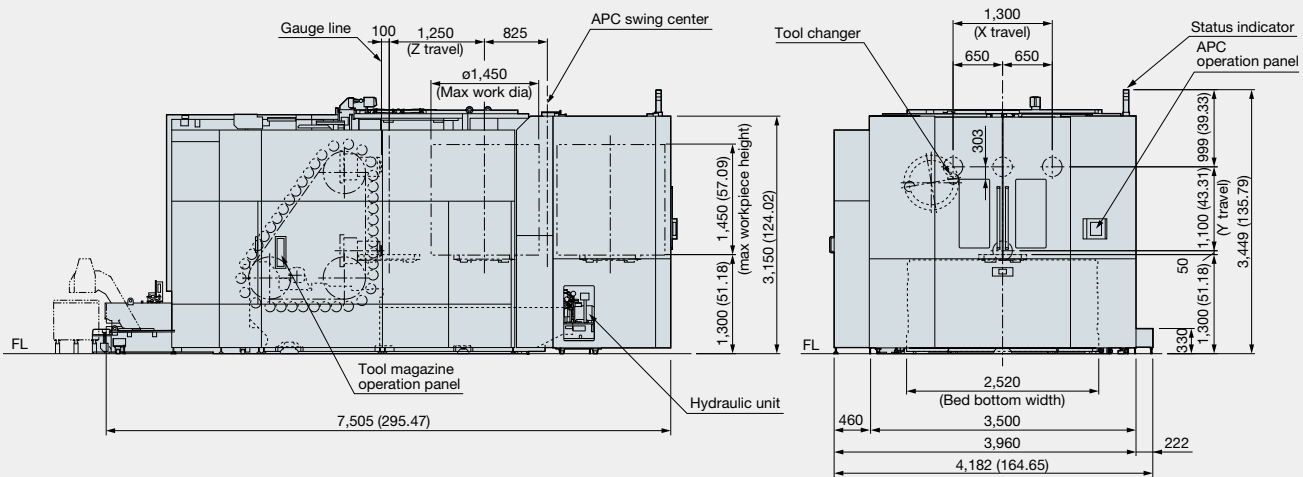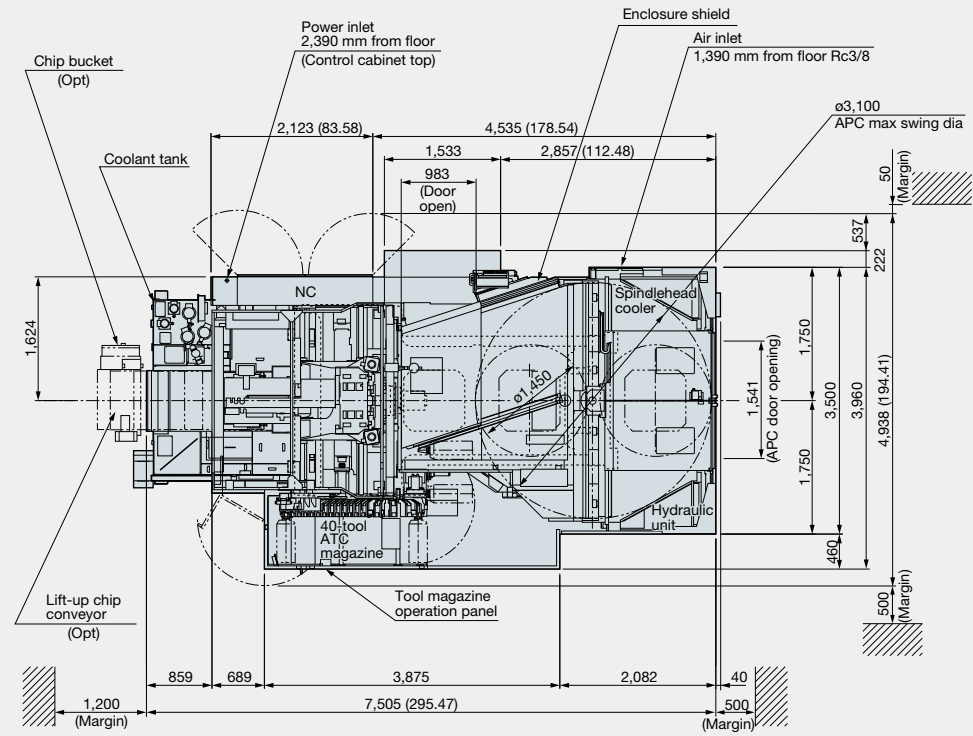

MB-10000H
Dimensional and Installation Drawings

Unit: mm (in)

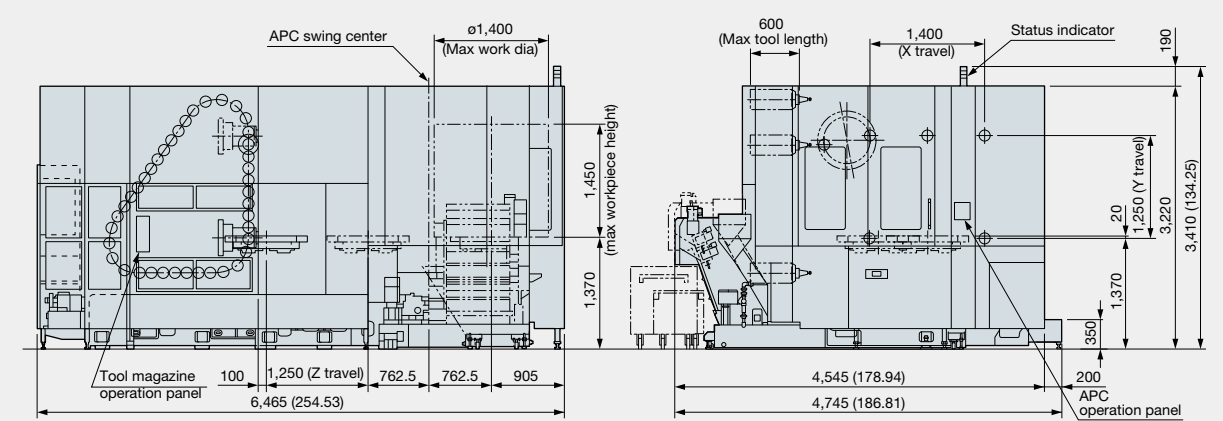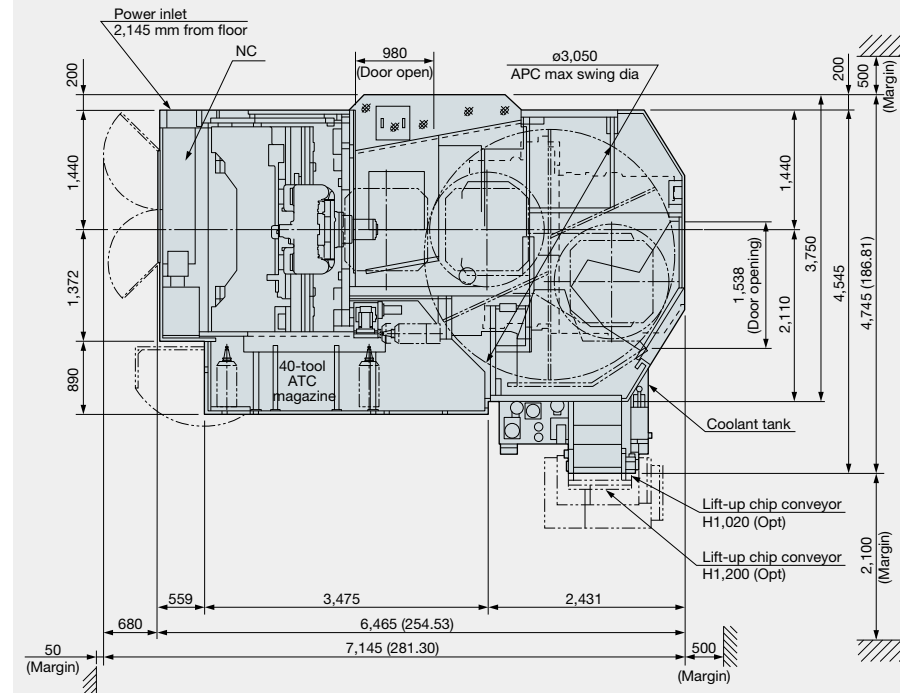

When using Okuma products, always read the safety precautions mentioned in the instruction manual and attached to the product.

● The specifications, illustrations, and descriptions in this brochure vary in different markets and are subject to change without notice.
Pub No. MB-H series-E-(9a)-400 (Jan 2020)



OKUMA Corporation

Oguchi-cho, Niwa-gun,
Aichi 480-0193, Japan
TEL: +81-587-95-7825 FAX: +81-587-95-6074

This product is subject to the Japanese government Foreign Exchange and Foreign Trade Control Act with regard to security controlled items; whereby Okuma Corporation should be notified prior to its shipment to another country.