

OPEN POSSIBILITIES

GENOS M-5AX series

GENOS M460V-5AX / **GENOS** M560V-5AX

5-AXIS VERTICAL MACHINING CENTER



Our customers spoke.

And we heard them, loud and clear.

When our customers give us feedback, we take it seriously. Over the years, we've heard a common refrain: many Okuma customers would love to own a 5-axis machine, but it has simply been out of their price range. Today we are answering that call with the introduction of the new **GENOS M-5AX series**. These machines offer unrivaled accuracy and productivity all at an affordable price point.

Made in Japan, the **GENOS M-5AX series** includes machines saturated with Okuma DNA making it a technological marvel that delivers swift and efficient parts production for the tightest tolerances. With simultaneous 5-axis machining capability, our customers don't have to make any compromises to reduce costs.

Whether they're manufacturing complex aerospace components or performing one-chuck multi-sided operations, they get superior quality and capability. No matter, which machining you need, the **GENOS M-5AX series** comes with our intuitive, renowned OSP machine control.

That Okuma machines you've always wanted? It's now within reach.





GENOS M460V-5AX



HIGH-CALIBER MACHINE CONSTRUCTION, FROM TOP TO BOTTOM.

Robust performance in a smaller footprint.


With its innovative double-column structure, the GENOS M-5AX series is a sturdy next-generation 5-axis vertical machining center, but specifically designed to take up less floor space in your shop. With a full 5-axis simultaneous control system and a thermally stable design, you are granted the ability to process even the most challenging materials and geometry. This uncompromising construction is what makes the GENOS M-5AX series such a machining powerhouse.

Pre-Tension Ball Screws: Exacting Performance Standards

High-precision ball screws generate roller guide movement to all three axes. They are directly coupled to Okuma servomotors, which match the electrical and mechanical prerequisites to meet performance requirements with uncompromising precision.

5-Axis Auto Tuning System: Total Movement Accuracy

The auto tuning system measures geometric error using a touch probe and datum sphere, performing compensations using measurement results to fine-tune the movement precisely. The end result is a higher level of accuracy, scaled to perfection. In the past, this kind of tune-up required a visit from a service professional. Now you can easily tune-up the machine on your own!

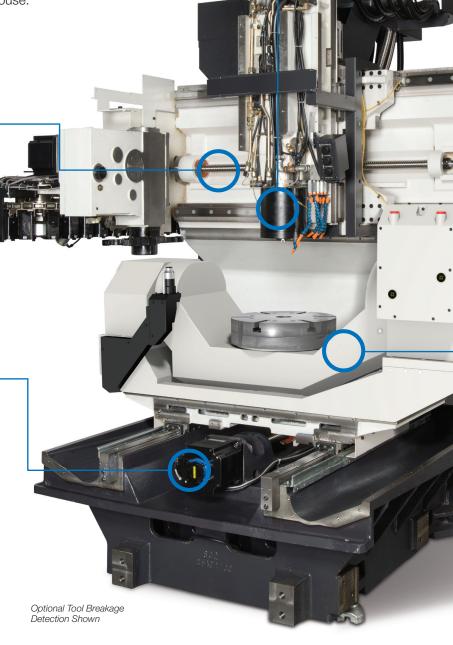



Spindle: Match Your Application

From titanium, to aluminum and light alloy applications, to die/molds and small precision parts, the GENOS M-5AX series is versatile to meet your stringent application requirements. The spindle motor design produces less vibration and power loss at the tool tip, which yields excellent surface finishes and impressive metal removal rates.



Solid Trunnion: Superior Accuracy and Machining Capabilities

Utilizing a hypoid gear drive, the first-rate trunnion construction offers excellent positioning accuracy, rigidity, and table rotation speed in a more durable design. The only thing more impressive than the resulting accuracy is the speed with which it's delivered.

Thermo-Friendly Concept: Temperature-Regulating Design

The machine's thermo-friendly structure allows it to maintain high dimensional accuracy when the room temperature changes. Also, with capability to stabilize thermal deformation due to process or interruption, warm-up time is automatically shortened, and the burden of dimensional correction during machine restart is reduced.



The most machine at the best price.

We call this Affordable Excellence.

There is so much to love about the GENOS M-5AX series. The Japanese-made machines offer the highest rigidity and stability possible with their double column cast iron machine bed and a high-speed spindle that comes with a two-year warranty with no shift or hour limitations. That same spindle delivers best-in-class performance, ensuring productivity and accuracy for big or small jobs. Of all the things to love about the GENOS M-5AX series, the price is probably the most important. In today's market, you simply can't get a machine that does more at a better value.

JOIN THE OKUMA FAMILY.

While the purchase of an Okuma machine is an investment in quality and performance, there's another benefit to ownership that can't be overlooked: becoming a part of the Okuma family. Our vast service network, spindle & board repair facilities, and inventory of the OEM-certified original parts are just a few difference examples that illustrate the Okuma difference. Soon you'll see that we're just as good at building relationships as we are at building machines.

For more product details, please visit www.okuma.eu

MACHINE SPECIFICATIONS

	Item	Unit	M460V-5AX	M560V-5AX
Travels	X-axis (saddle left/right) Y-axis (pallet front/back) Z-axis (spindle up/down) A-axis C-axis Table surface to spindle nose	mm mm deg deg mm	762 460 460 +20 to -110 360 100 to 560	1,050 560 460 +20 to -110 360 160 to 620
Table	Table size Max work size Floor to table top Max load capacity	mm mm mm kg	ø400 ø600 x h400 1,050 300	ø500 ø700 x h500 1,090 400
Spindle	Spindle speed No. of spindle ranges Spindle taper Bearing dia	min ⁻¹	15,000 Infinitely Variable 7/24 taper No. 40 ø70	15,000 Infinitely variable 7/24 taper No. 40 ø70
Feed	Rapid traverse Rapid traverse (A-C) Cutting feedrate	m/min deg/min mm/min	X, Y: 40 Z: 32 A: 14,400, C: 18,000 X, Y, Z: 32,000	X, Y: 40, Z: 32 A: 14,400, C: 18,000 X, Y, Z: 32,000
Motors	Spindle (10min/cont) Feed axes	kW kW	22/18.5 (10 min/cont) X, Y, Z: 3.5 A: 4.2, C:3.0	22/18.5 (10 min/cont) X, Y, Z: 3.5 A: 4.2, C: 3.0
ATC	Tool shank Pull stud Tool capacity Max tool dia (with adjacent tool) Max tool dia (without adjacent tool) Max tool length Max tool weight Max tool moment Tool selection	tools mm mm mm kg N-m	MAS BT40 JIS-specified with though hole 48 ø90 ø125 240 8 7.8 [8 kg x 100 mm] Memory random	MAS BT40 JIS-specified with though hole 60 ø90 ø125 300 8 7.8 [8 kg × 100 mm] Memory random
Machine size	Height Floor space W x D Weight	mm mm kg	2,946 2,160 x 3,006 8,300	3,045 2,515 x 3,718 10,300
Controller			OSP-P500M	OSP-P500M

STANDARD SPECIFICATIONS / ACCESSORIES

Item	Remarks	
Spindle speed 50 to 15,000 min	BT 40, 22/18.5 kW	
Rapids X-Y: 40, Z: 32 m/min		
Spindle/Spindlehead cooling system	Oil controller	
Air cleaner (filter)	Including regulator	
Spindle oil-air lubrication system		
A/C axis rotary table	0.0001 deg, includes DD encoders	
C axis table	ø400, T groove 18H7 6-tool	
Auto tool changer M460V-5AX	48-tool	
Auto tool changer M560V-5AX	60-tool	
ATC magazine shutter		
Coolant supply system	Tank: 170 L [Effective: 100 L], pump: 250W	
Coolant nozzle	Flexible nozzle 5-tool	
Chip handling system	Coil conveyor system - table left/right	

Item	Remarks			
Chip pan	Effective capacity: 60 L			
ATC air blower (blast)				
Chip air blower (blast)	Nozzle type			
Foundation blocks (with jack bolts)	8 pcs (with jack bolts)			
3-lamp status indicator	Type C (LED signal tower)			
Work lamp	LED			
Full enclosure shielding	With ceiling			
Tapered bore cleaning bar				
Hand tools				
Tool box				
CNC	OSP-P500M			
Operation panel with color LCD				
Pulse handle				





OSP suite

TAKE CONTROL WITH THE OSP-P500!

Our control OSP-P500 lets you follow your instincts.

Okuma's OSP-P500 reaches a new dimension, when merging Intelligent Technologies with various software applications to create a remarkable user experience. Designed by Okuma for Okuma machines, the OSP-P500 is packed with maximum flexibility and efficiency, including:

- Easy-to-use operation, even for inexperienced users
- · New digital twin functionality
- ECO Suite Plus and Intelligent Technology to level up your sustainability possibilities
- Cyber security functions to secure the machines from cyber attacks
- · And many more fascinating features!

The evolution of our Intelligent Technology is also a bonus for operators. The following innovations can be managed through the OSP-P500M:

- Thermo-Friendly Concept
- Collision Avoidance System*
- Machining Navi*
- 5-Axis Auto Tuning System**
- SERVONAVI®

When combined with our suite of apps, as well as the energy-saving techniques of our ECO suite, the OSP-P500M is yet another way Okuma provides unparalleled value to our customers.

**Optional, Basic specification

^{*}Optional



